


ECO-FRIENDLY ADVANCE TECHNOLOGY BATTERY



12- EFSN -5, 12V 5Ah@20HR

DIMENSION

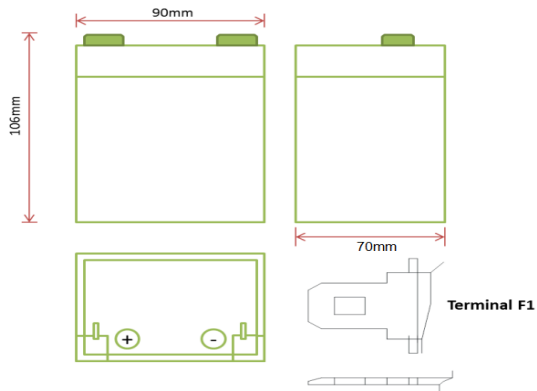


DISCHARGE CURRENT & END DISCHARGE VOLTAGE


Discharge Current (A)	Final Discharge Voltage (V/Cell)
0.05C or below or intermittent discharge	11.4
0.05C of current close to it	11.1
0.1C of current close to it	10.8
0.2C of current close to it	10.5
0.2C-0.5C	10.2
0.5C-1C	9.6
1C-3C	9.0
>3C	7.8

SPECIFICATIONS CYCLE LIFE GRAPH (25°C/77°F)

Nominal Voltage		12V
Rated Capacity (20 hour rate)		5.0AH
Dimension	Total Height (with terminals)	106 mm (4.17 Inch)
	Height	101mm (3.97 Inch)
	Length	90mm (3.54 Inch)
	Width	70mm (2.75 Inch)
Weight		Approx.1.6Kg(3.5Lbs)
Capacity (77°F/25°C)	10 hour rate (0.45A)	4.5AH
	5 hour rate (0.8A)	4.0AH
Internal Resistance (77°F/25°C)	Full Charged Battery	<30mΩ
Self-Discharge (77°F/25°C)	After 3 months Storage	95%
	After 6 months storage	85%
	After 12 months storage	80%
Max Discharge Current (77°F/25°C)		50A(5S)
Terminal	Standard	F1
	Optional	
Charging (Constant Voltage)	Cycle	14.4V-14.7V (77°F/25°C)
	Float	13.5V-13.8V (77°F/25°C)

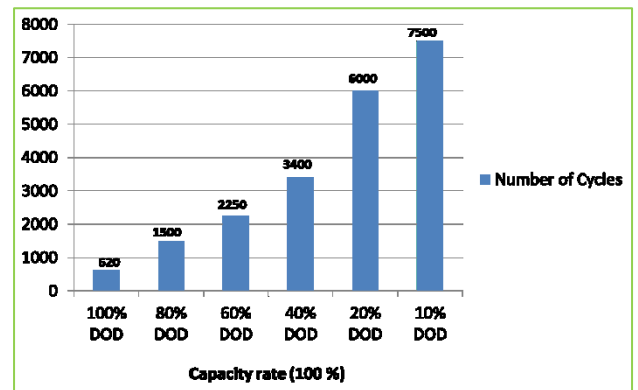

TEMPERATURE & FLOAT SERVICE LIFE

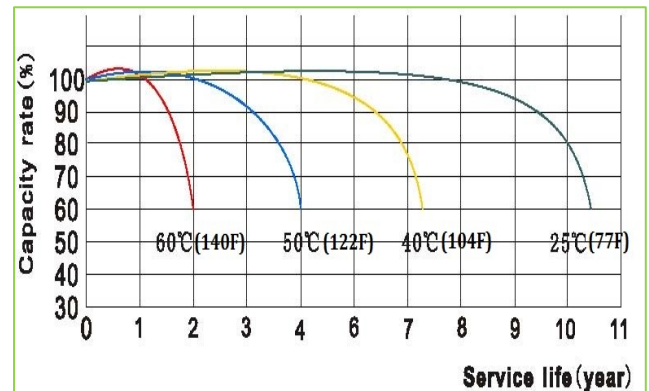

CONSTANT CURRENT DISCHARGE CHARACTERISTICS UNITS AMPERES (25°C/77°F)

Time (Mins)


End Voltage per cell (V)	5	15	30	45	60	120	180	240	300	360	480	600	720	1200	1440
1.60	16.51	8.74	5.28	3.85	3.10	1.78	1.29	1.01	0.86	0.73	0.56	0.47	0.39	0.25	0.21
1.67	15.35	8.45	5.20	3.82	3.10	1.77	1.27	1.01	0.85	0.73	0.56	0.46	0.39	0.25	0.21
1.70	15.19	8.32	5.15	3.77	3.07	1.75	1.26	1.00	0.84	0.72	0.56	0.46	0.39	0.25	0.21
1.75	13.92	8.06	5.10	3.75	3.02	1.72	1.25	0.99	0.83	0.72	0.55	0.46	0.39	0.25	0.21
1.80	12.48	7.54	4.89	3.64	2.94	1.69	1.25	0.99	0.82	0.71	0.55	0.45	0.38	0.24	0.21
1.83	11.93	6.92	4.81	3.51	2.81	1.68	1.20	0.94	0.80	0.68	0.54	0.43	0.37	0.24	0.20
1.85	11.18	6.71	4.50	3.38	2.73	1.61	1.17	0.93	0.78	0.66	0.53	0.43	0.36	0.24	0.20

DISCHARGE DATA WITH CONSTANT POWER UNITS: WATTS PER CELL (25°C/77°F)


Time (Mins)

End Voltage per cell (V)	5	15	30	45	60	120	180	240	300	360	480	600	720	1200	1440
1.60	27.59	15.34	9.88	7.20	5.80	3.36	2.45	1.94	1.64	1.41	1.09	0.90	0.76	0.50	0.41
1.67	26.27	15.11	9.48	7.15	5.78	3.36	2.42	1.94	1.64	1.41	1.09	0.90	0.76	0.50	0.41
1.70	26.11	15.01	9.46	7.15	5.75	3.33	2.41	1.93	1.62	1.40	1.08	0.89	0.75	0.50	0.41
1.75	24.32	14.82	9.44	7.15	5.72	3.30	2.38	1.93	1.61	1.39	1.07	0.88	0.75	0.50	0.41
1.80	22.32	14.07	9.28	7.02	5.70	3.30	2.35	1.92	1.60	1.39	1.07	0.88	0.75	0.49	0.41
1.83	21.53	12.93	9.21	6.81	5.46	3.28	2.31	1.86	1.58	1.34	1.07	0.85	0.74	0.48	0.41
1.85	19.95	12.64	8.56	6.55	5.31	3.20	2.28	1.84	1.54	1.32	1.03	0.85	0.72	0.48	0.41

FLOATING CHARGE CHARACTERISTICS (25°C/77°F)

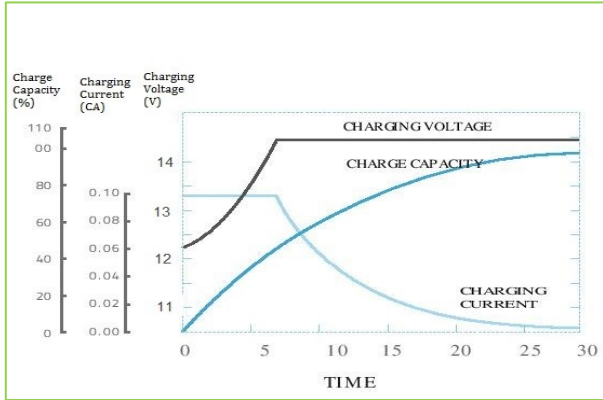


CYCLE CHARGE CHARACTERISTIC (25°C/77°F)

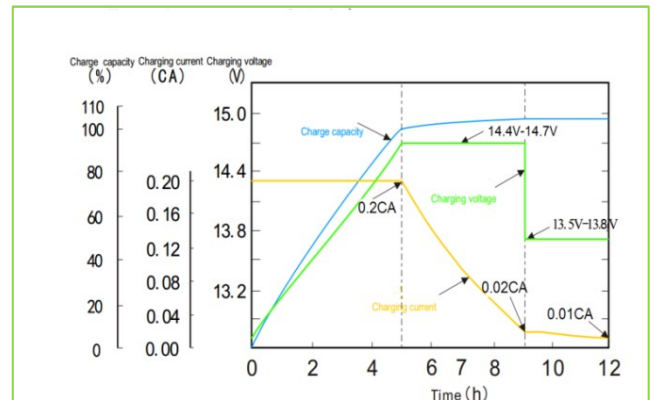


Soneil Chargers Recommended

FLOAT SERVICE LIFE CURVE GRAPH

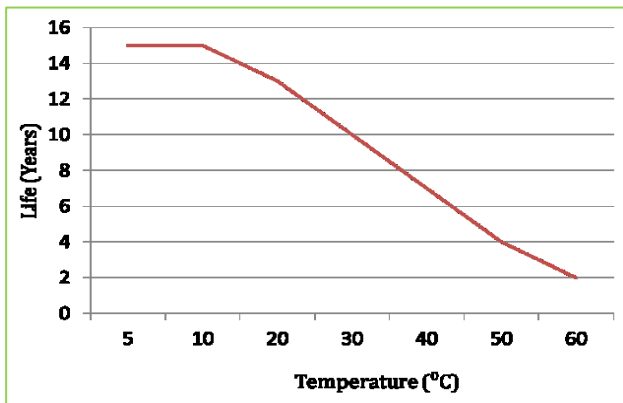

TEMPERATURE AND DISCHARGE CAPACITY

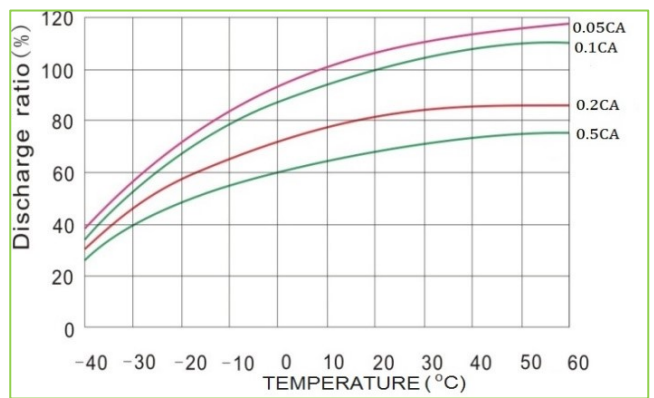

“Specifications subject to change without notice “

Domestic & International Sales: Tel: +1 905 565 0360 Fax: +1 905 799 6821, Email: info@soneil.com

Corporate Office: 180 Advance Blvd, Unit 3, Brampton, Ontario, Canada L6T 4J4



www.soneil.com